Item no.: 1010587



Presence and motion detectors Outdoor detectors

Description

- Passive infra-red motion detector
- For outdoor use
- Additional creep under protection
- Sensor head can be turned by ± 90° horizontally and by 30° downwards
- Adjustable brightness switching value and switch-off delay
- Mixed light measurement suitable for the control of fluorescent, incandescent, halogen lamps and LEDs
- Zero-cross switching for relay-saving switching and high lamp loads
- Teach-in of current brightness value possible
- Pulse function
- Test function for checking detection area
- Installation on flush-mounted socket possible (60 mm)
- Single-handed plug-in installation
- Instant start-up possible via factory preset
- Controls are place protected
- Terminal for protective earth conductor





Technical data

	theLuxa S180 E WH	
Operating voltage	230 V AC	
Frequency	50 Hz	
Stand-by consumption	~0.9 W	
Light measurement	Mixed light measurement	
Number of channels	1	
Colour	White	
Switching output	Light	
Installation type	Wall installation	
Setting range brightness	5 – 1000 lx	

	theLuxa S180 E WH	
Switching capacity	10 A at 230 V AC, $\cos \varphi = 1$, 6 A at 230 V AC, $\cos \varphi = 0.6$, 3 AX at 230 V AC, $\cos \varphi = 0.3$	
Detection angle	180°	
Installation height	2 – 4 m	
Light switch-off delay	1 s-20 min	
Incandescent/halogen lamp load	2300 W	
Fluorescent lamp load (conventional) not corrected	2300 VA	

Item no.: 1010587




Technical data


	theLuxa S180 E WH	
Fluorescent lamp load (conventional) parallel-corrected	1200 VA 120 μF	
Fluorescent lamp load (conventional) series-corrected	2300 VA	
Fluorescent lamp load (electronic ballast)	1000 W	
Energy saving lamps	250 W	
Inrush current	max. 300 A / 200 µs	
LED lamp < 2 W	50 W	

	theLuxa S180 E WH	
LED lamp 2-8 W	500 W	
LED lamp > 8 W	500 W	
Lamps	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs	
Ambient temperature	-25°C 45°C	
Impact resistance	IK04	
Protection class	II	
Type of protection	IP 55	

Connection example








Detection range for planning applications


Mounting height (A)	Diagonally (t)	Head on to (R)
2 m	9 m	3 m
2.5 m	12 m	5 m
3 m	12 m	5 m
3.5 m	12 m	5 m
4 m	9 m	3 m

Item no.: 1010587





Detection range for planning applications

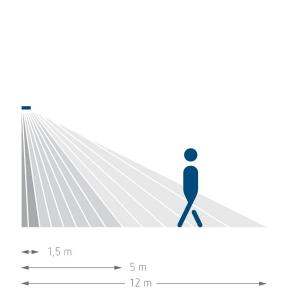

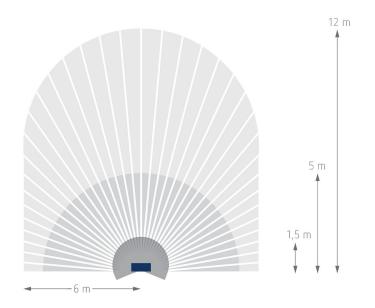

Scale drawings

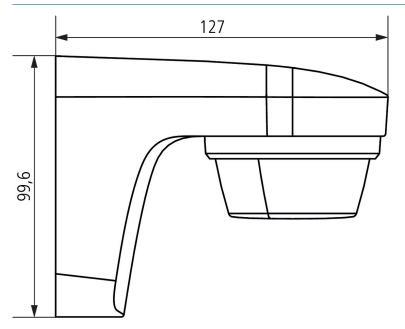

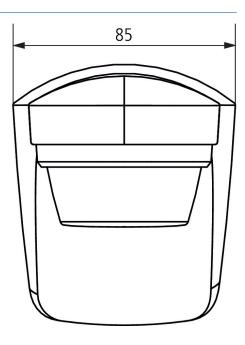

Item no.: 1010587



Accessories

Corner angle theLuxa S WH Item no.: 9070902



Spacer theLuxa S WH Item no.: 9070906

